5 Cable Management

After installing the DVD wall mount, place DVD gently on the mounted glass shelf. Run the cable through the cable clip as shown in fig.5.1.

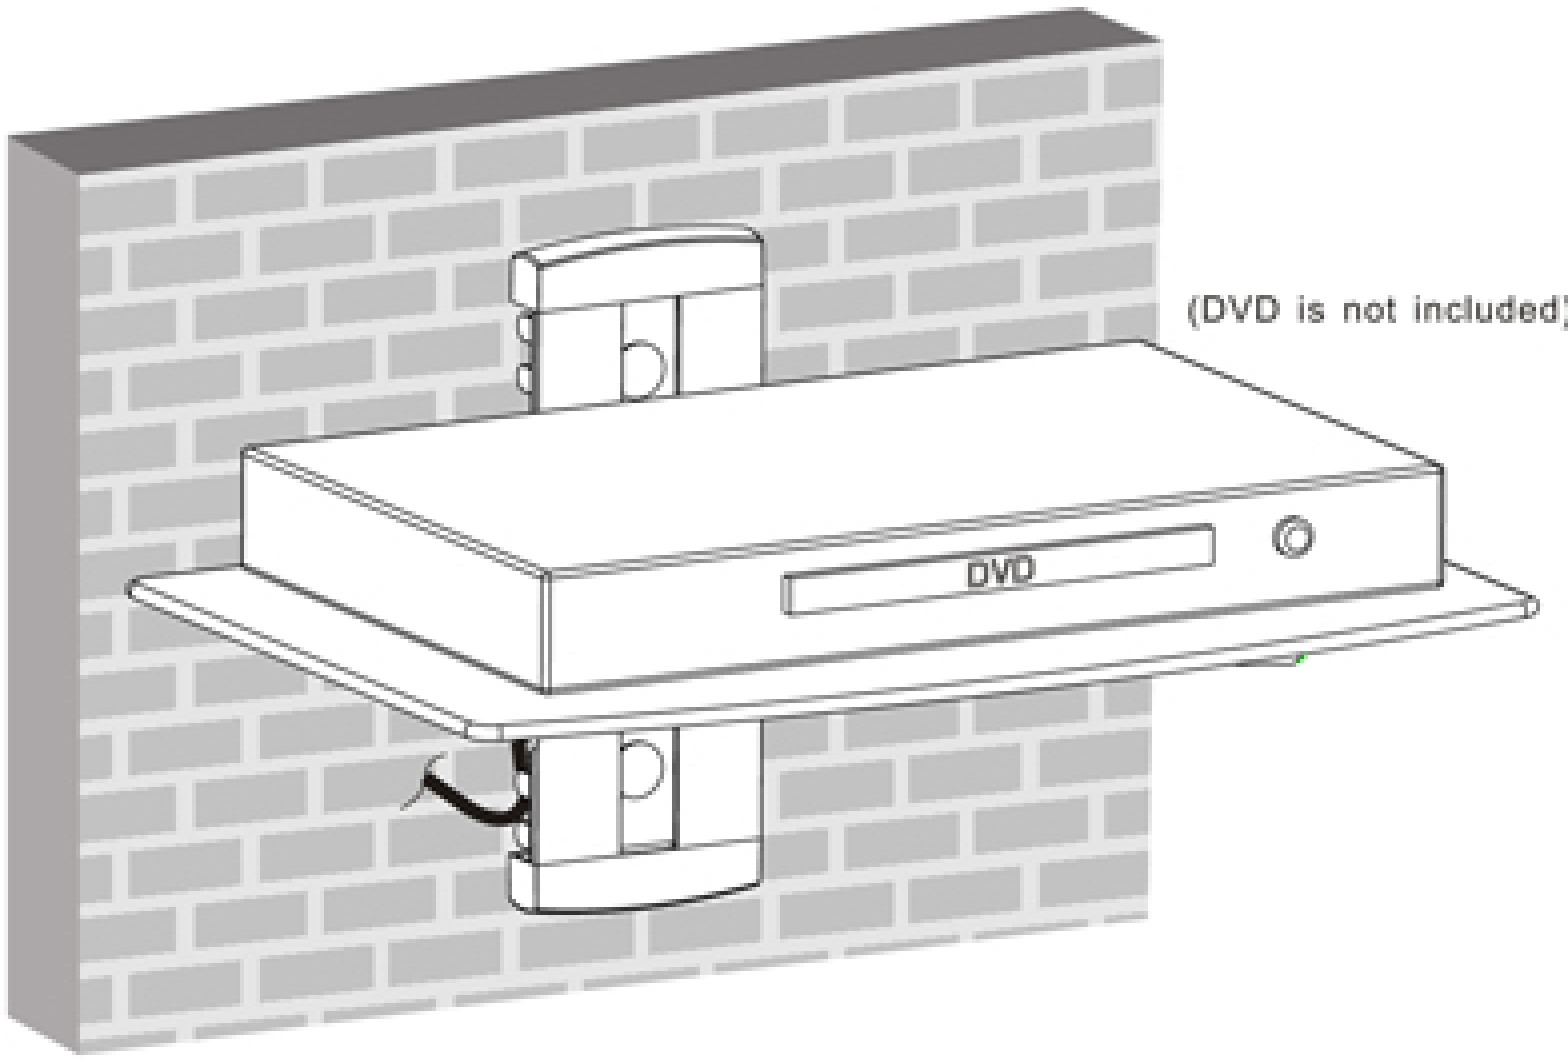

(DVD is not included)

fig.5.1

Maintenance

- Once you have mounted the DVD bracket, Check that they are sufficiently secured and safely to use. You should check whether screws are fixed well every two months.
- If you have any doubts regarding the installation, please consult our retailer or service department for detail.

XTREME™
MOUNTS AND BRACKETS

XTREME™
MOUNTS AND BRACKETS

INSTALLATION INSTRUCTIONS

Universal
Single Shelf Wall Mount

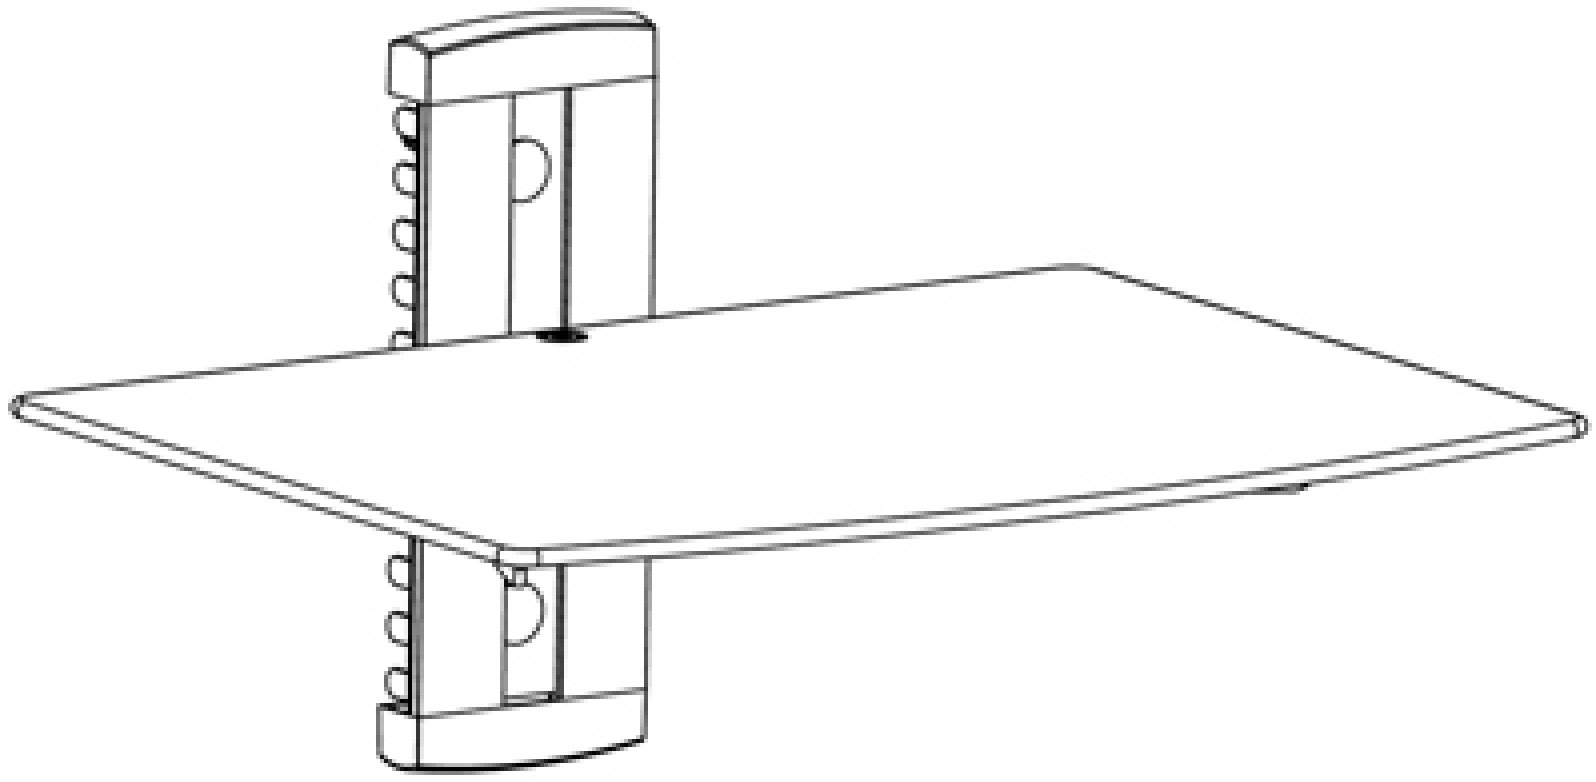



Customer Service: 877-536-8766
www.XtremeCables.net
Item#17910

2 Assembling The Glass Holder

Attach the connect piece to the glass holder using two screws and space reserved 3mm as shown in fig.2.1.

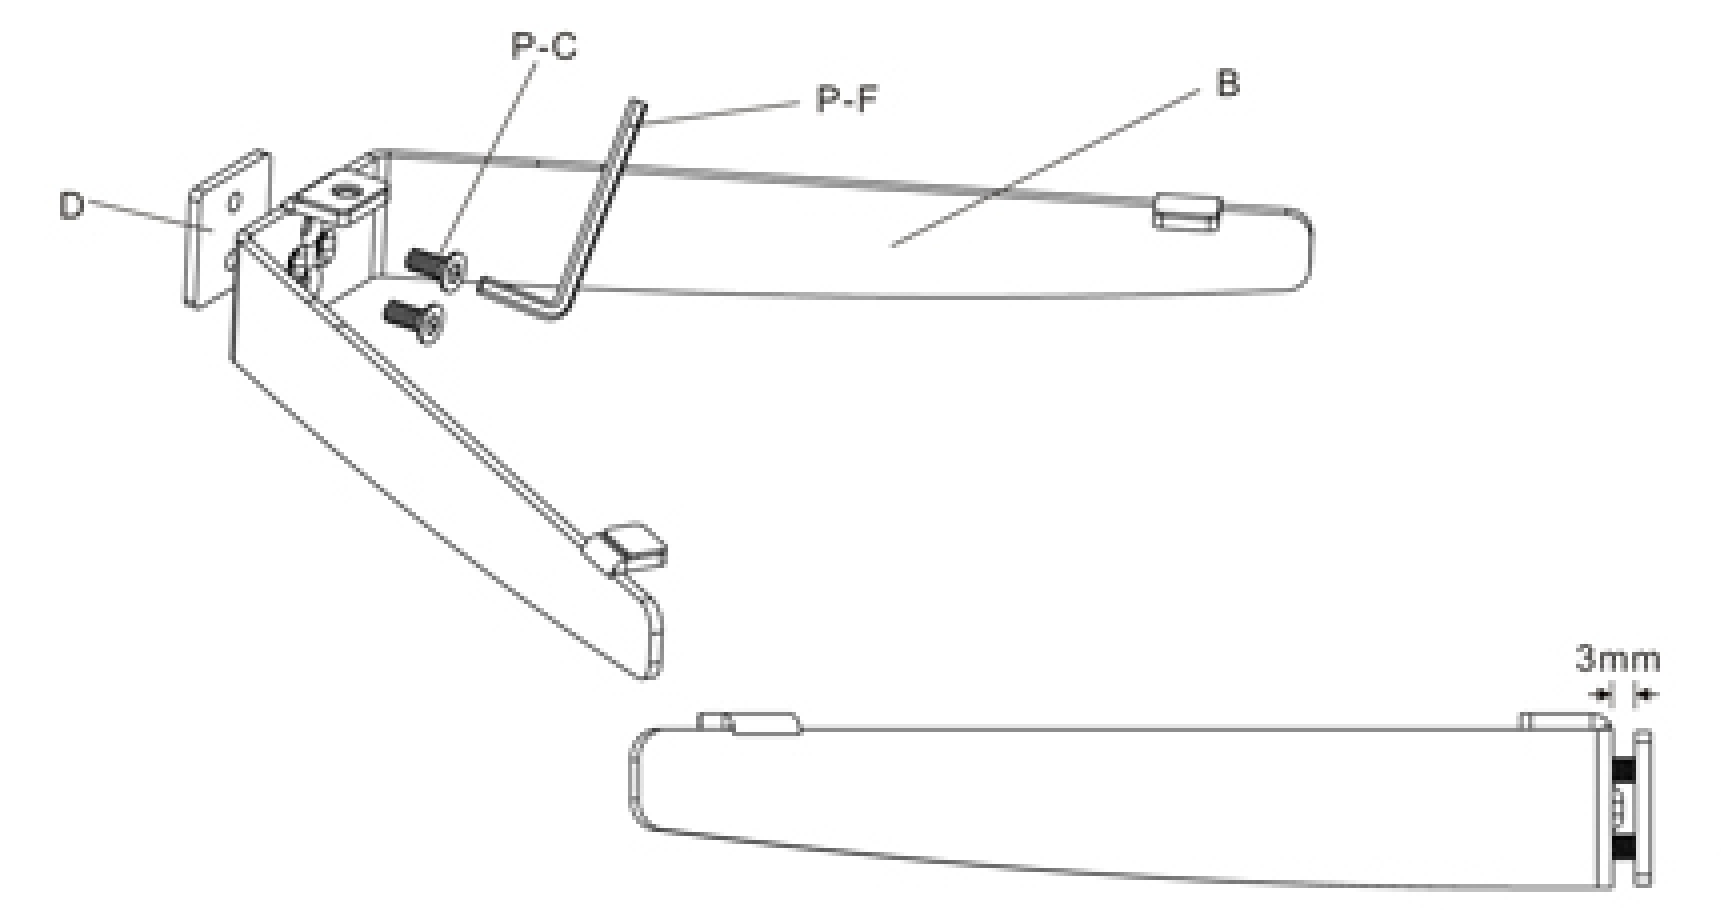

fig.2.1

3 Installing The Glass Holder

Insert the glass holder into the wall plate along the wall plate rail at the desired height, and then tighten two screws with a 3mm Allen key as shown in fig.3.1 .

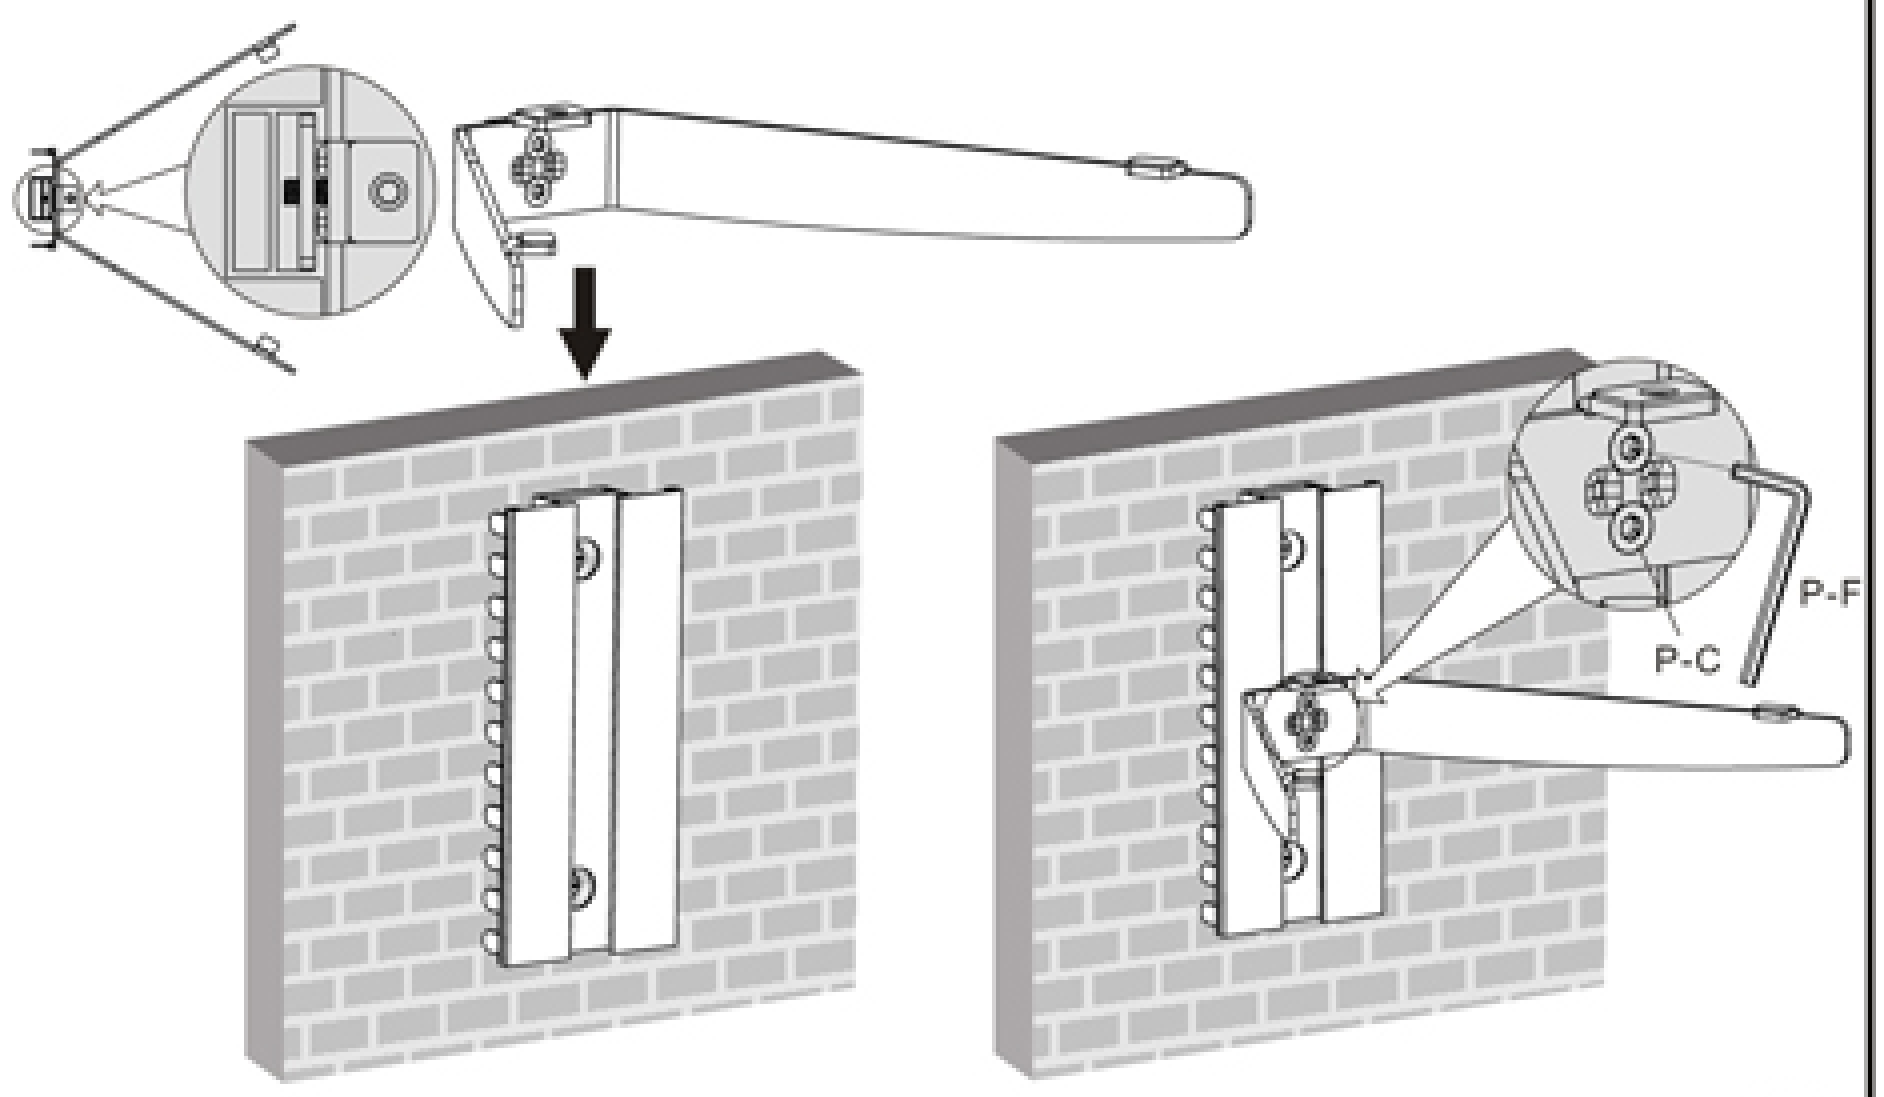

fig.3.1

- Insert two decorative covers to the top and bottom of wall plate respectively and install two plastic covers as shown in fig.3.2.
- You can adjust the height of the glass holder as needed. Loosen the two screws with a 3mm Allen key (but not remove)to adjust the glass holder at the desired height and then tighten two screws with a 3mm Allen key as shown in fig.3.2.

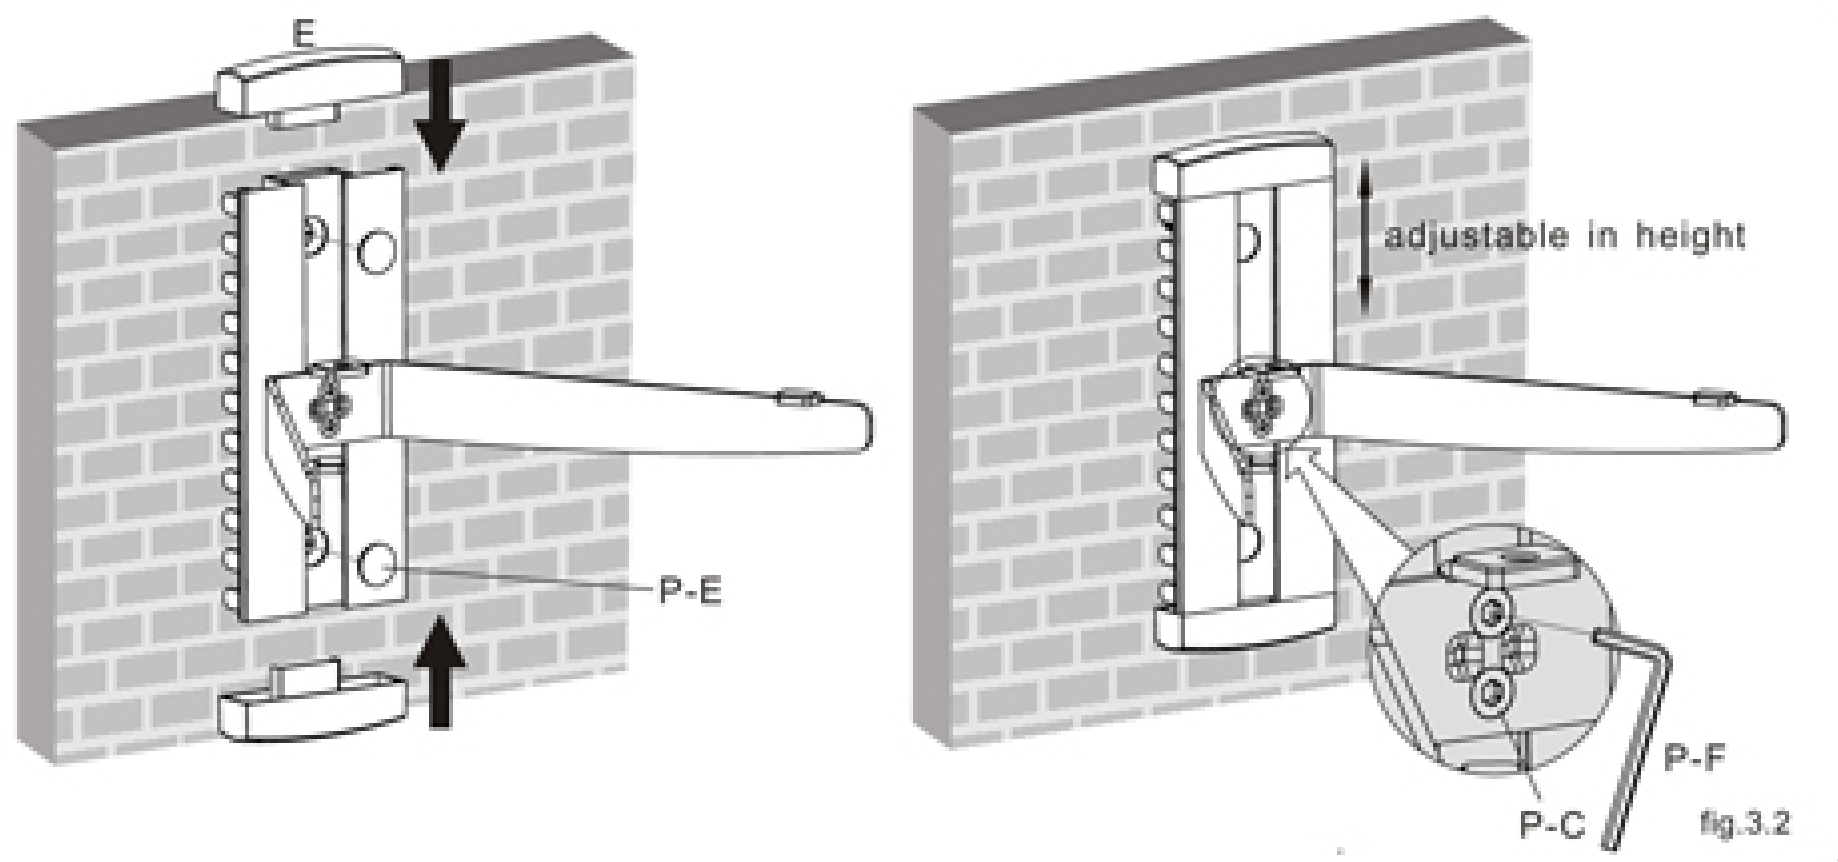

fig.3.2

4 Installing The Glass Shelf

Place the glass shelf gently on the glass holder. Attach the glass shelf to the glass holder using a screw and plastic bush, tighten screw with a 3mm Allen key but not tighten completely at this time. Center the glass shelf over hole, securely tighten screw with a 3mm Allen key as shown in fig.4.1.

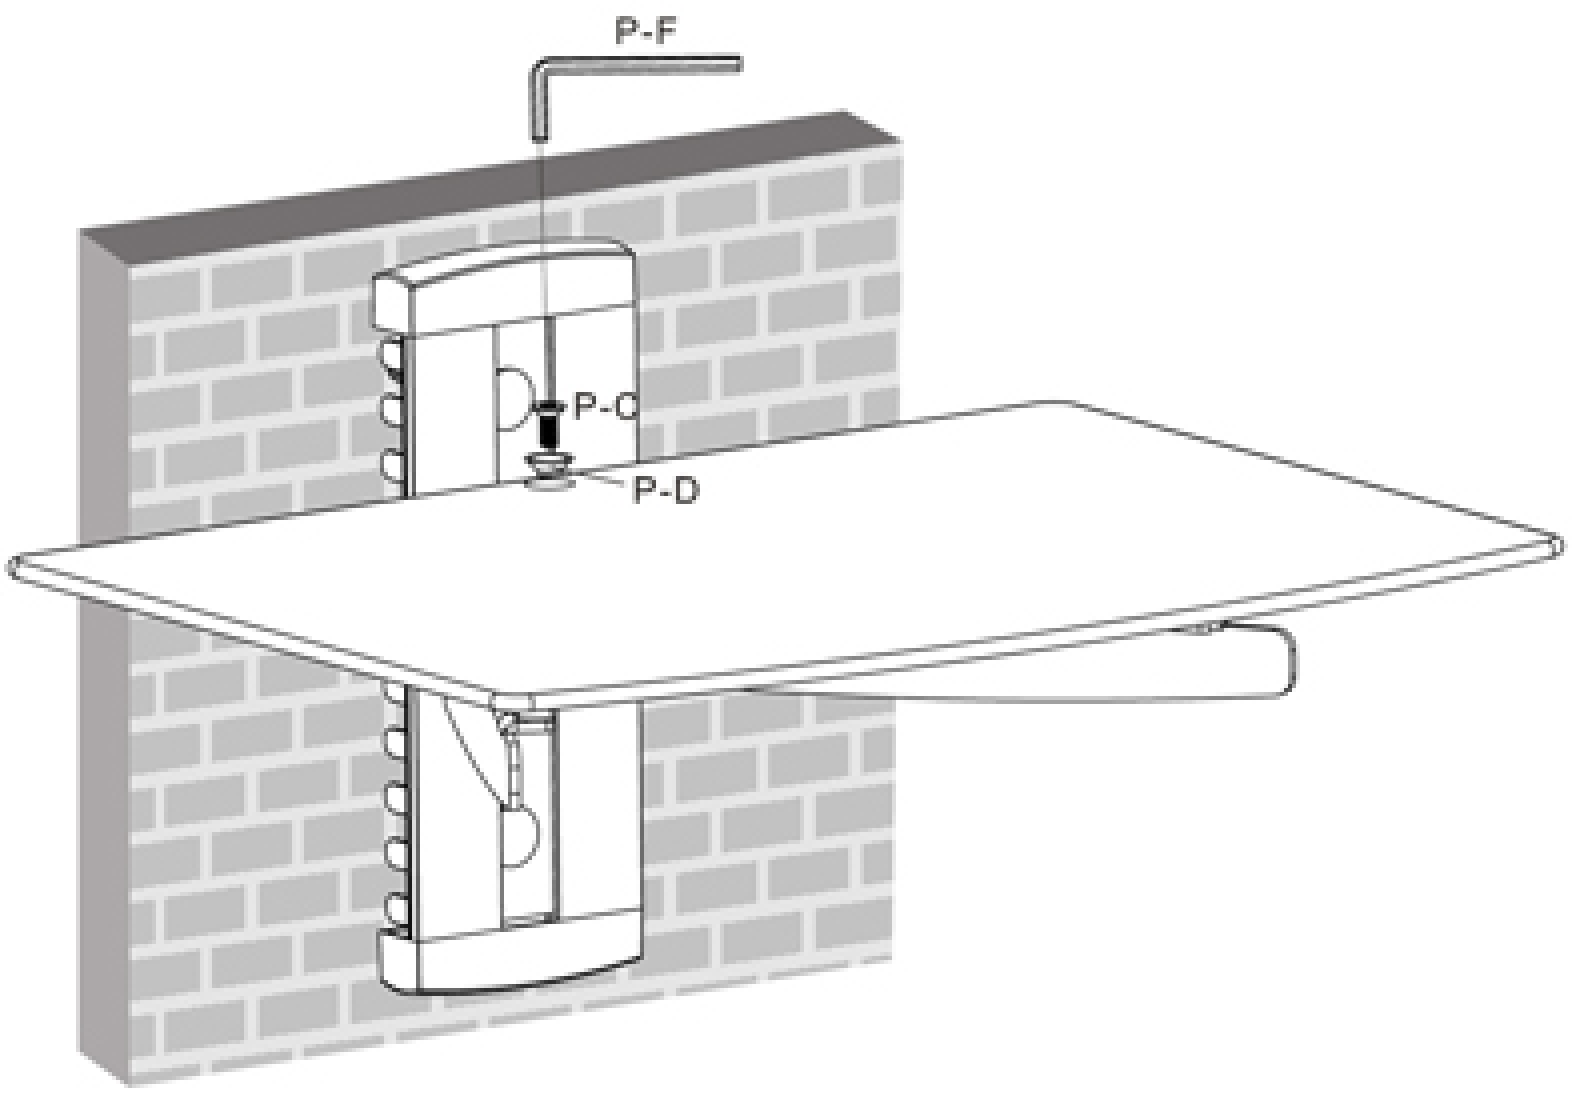

fig.4.1

1a WOOD STUD WALL MOUNTING:

⚠ WARNING

- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- Tighten wood screws firmly, but do not over tighten. Over tightening can damage the screws, greatly reducing their holding power.
- Make sure that mounting screws are anchored into the center of the studs. Use of an "edge to edge" stud finder is highly recommended.
- Hardware provided is for attachment of mount through standard thickness drywall or plaster into studs. Installers are responsible to provide hardware for other types of mounting situations.

- Use a stud finder to locate the edges of the studs. Use of an edge-to-edge stud finder is highly recommended. Based on their edges, draw a vertical line down each stud's center.
- Place wall plate on wall as a template. And mark the center of the two mounting holes. Make sure that the mounting holes are on the stud centerline.
- Drill two 1/8" (3mm) dia. Holes 1.2" (30mm) deep. Secure it using two screws (P-A), make sure that the wall plate is level as shown in fig. 1.1.

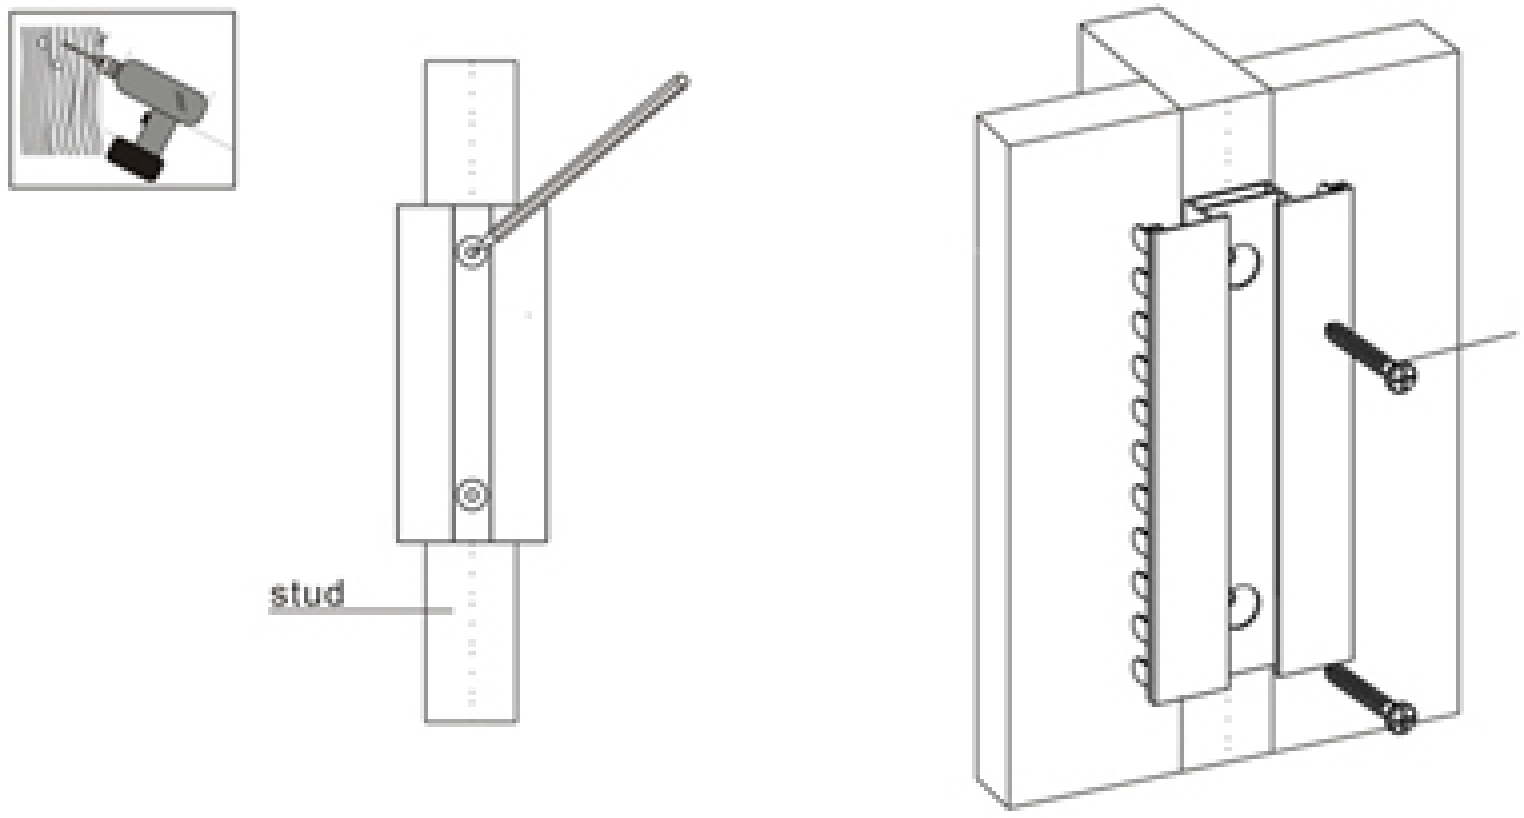

fig.1.1

1b SOLID BRICK AND CONCRETE BLOCK MOUNTING:

⚠ WARNING

- When installing wall mounts on cinder block, verify that you have a minimum of 1-3/8" of actual concrete thickness in the hole to be used for the concrete anchors. Do not drill into mortar joints! Be sure to mount in a solid part of the block, generally 1" minimum from the side of the block. It is suggested electric drill on slow setting is used to drill the hole instead of a hammer drill to avoid breaking out the back of the hole when entering a void or cavity.
- Installer must verify that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.

- Use the wall plate as a template to mark two holes locations on the wall as shown in fig.1.2.
- Pre-drill these holes with a 8mm masonry bit to at least 50mm in depth. Insert a Concrete Anchor (P-B) into each of these holes. Attach the wall plate to the wall using two screws (P-A), make sure that the wall plate is level as shown in fig.1.2.

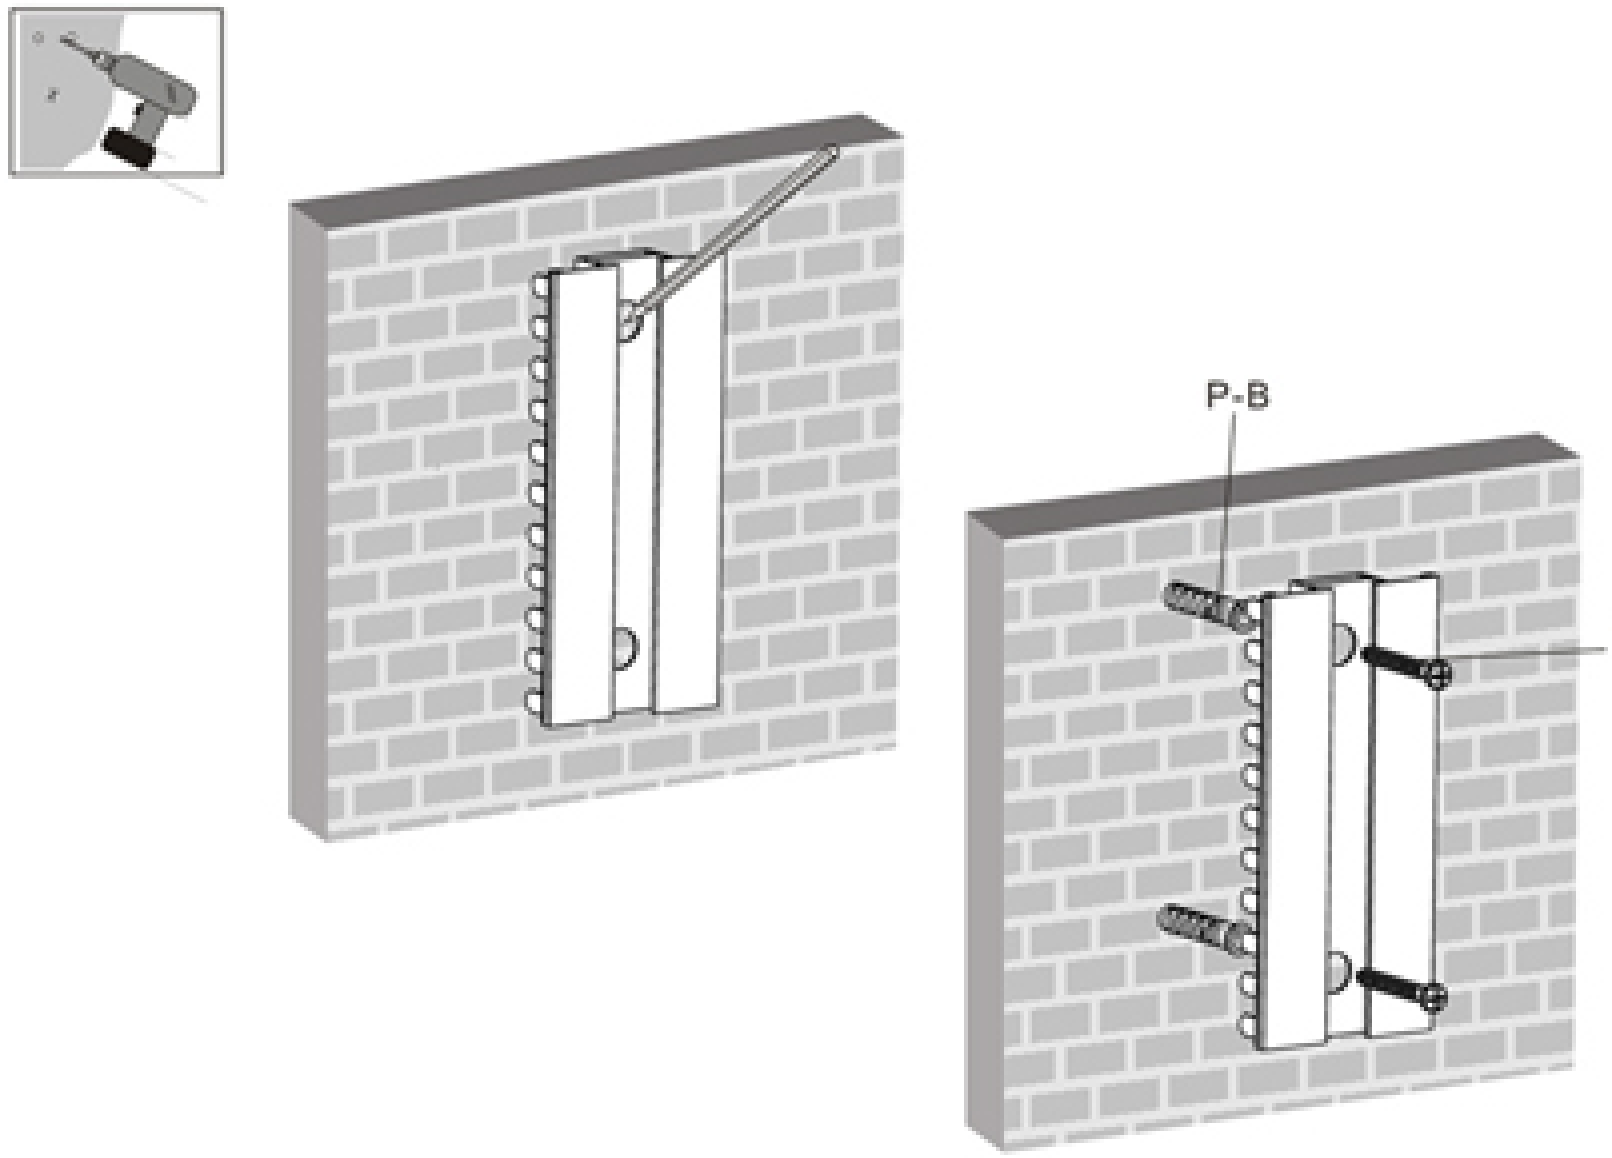

fig.1.2

2 Assembling The Glass Holder

Attach the connect piece to the glass holder using two screws and space reserved 3mm as shown in fig.2.1.

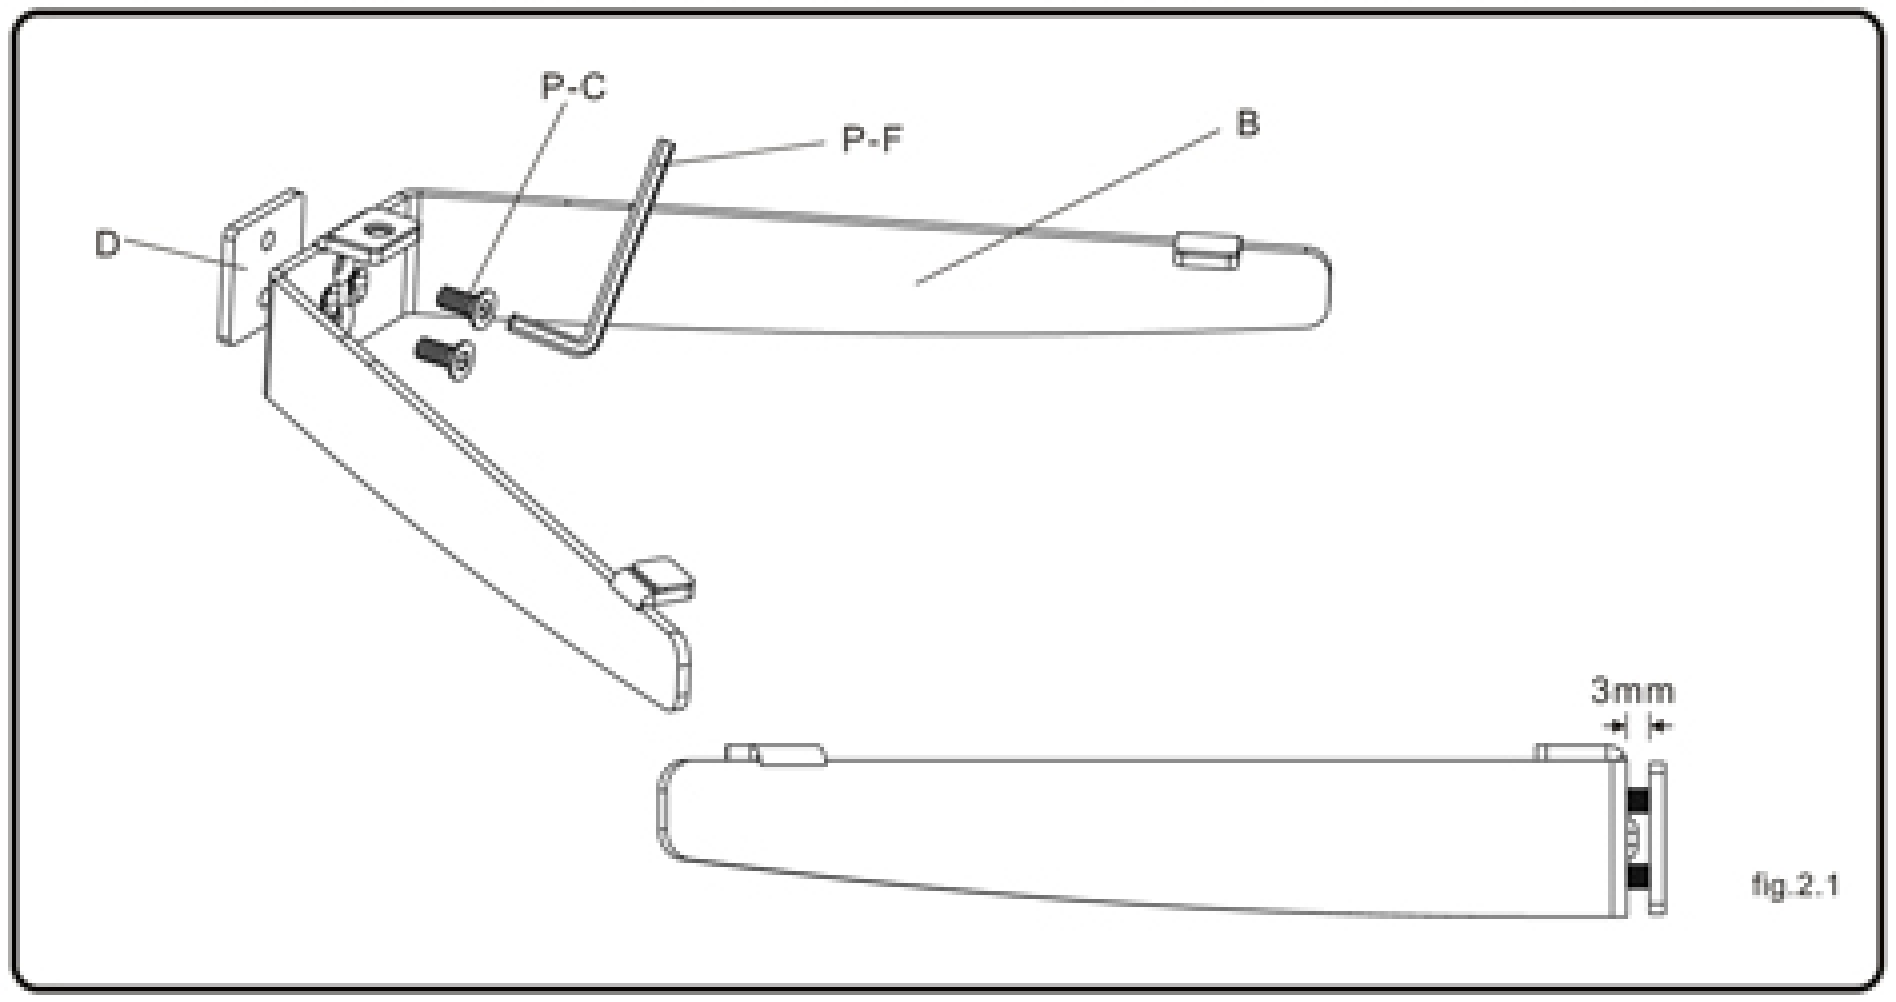

fig.2.1

3 Installing The Glass Holder

Insert the glass holder into the wall plate along the wall plate rail at the desired height, and then tighten two screws with a 3mm Allen key as shown in fig.3.1 .

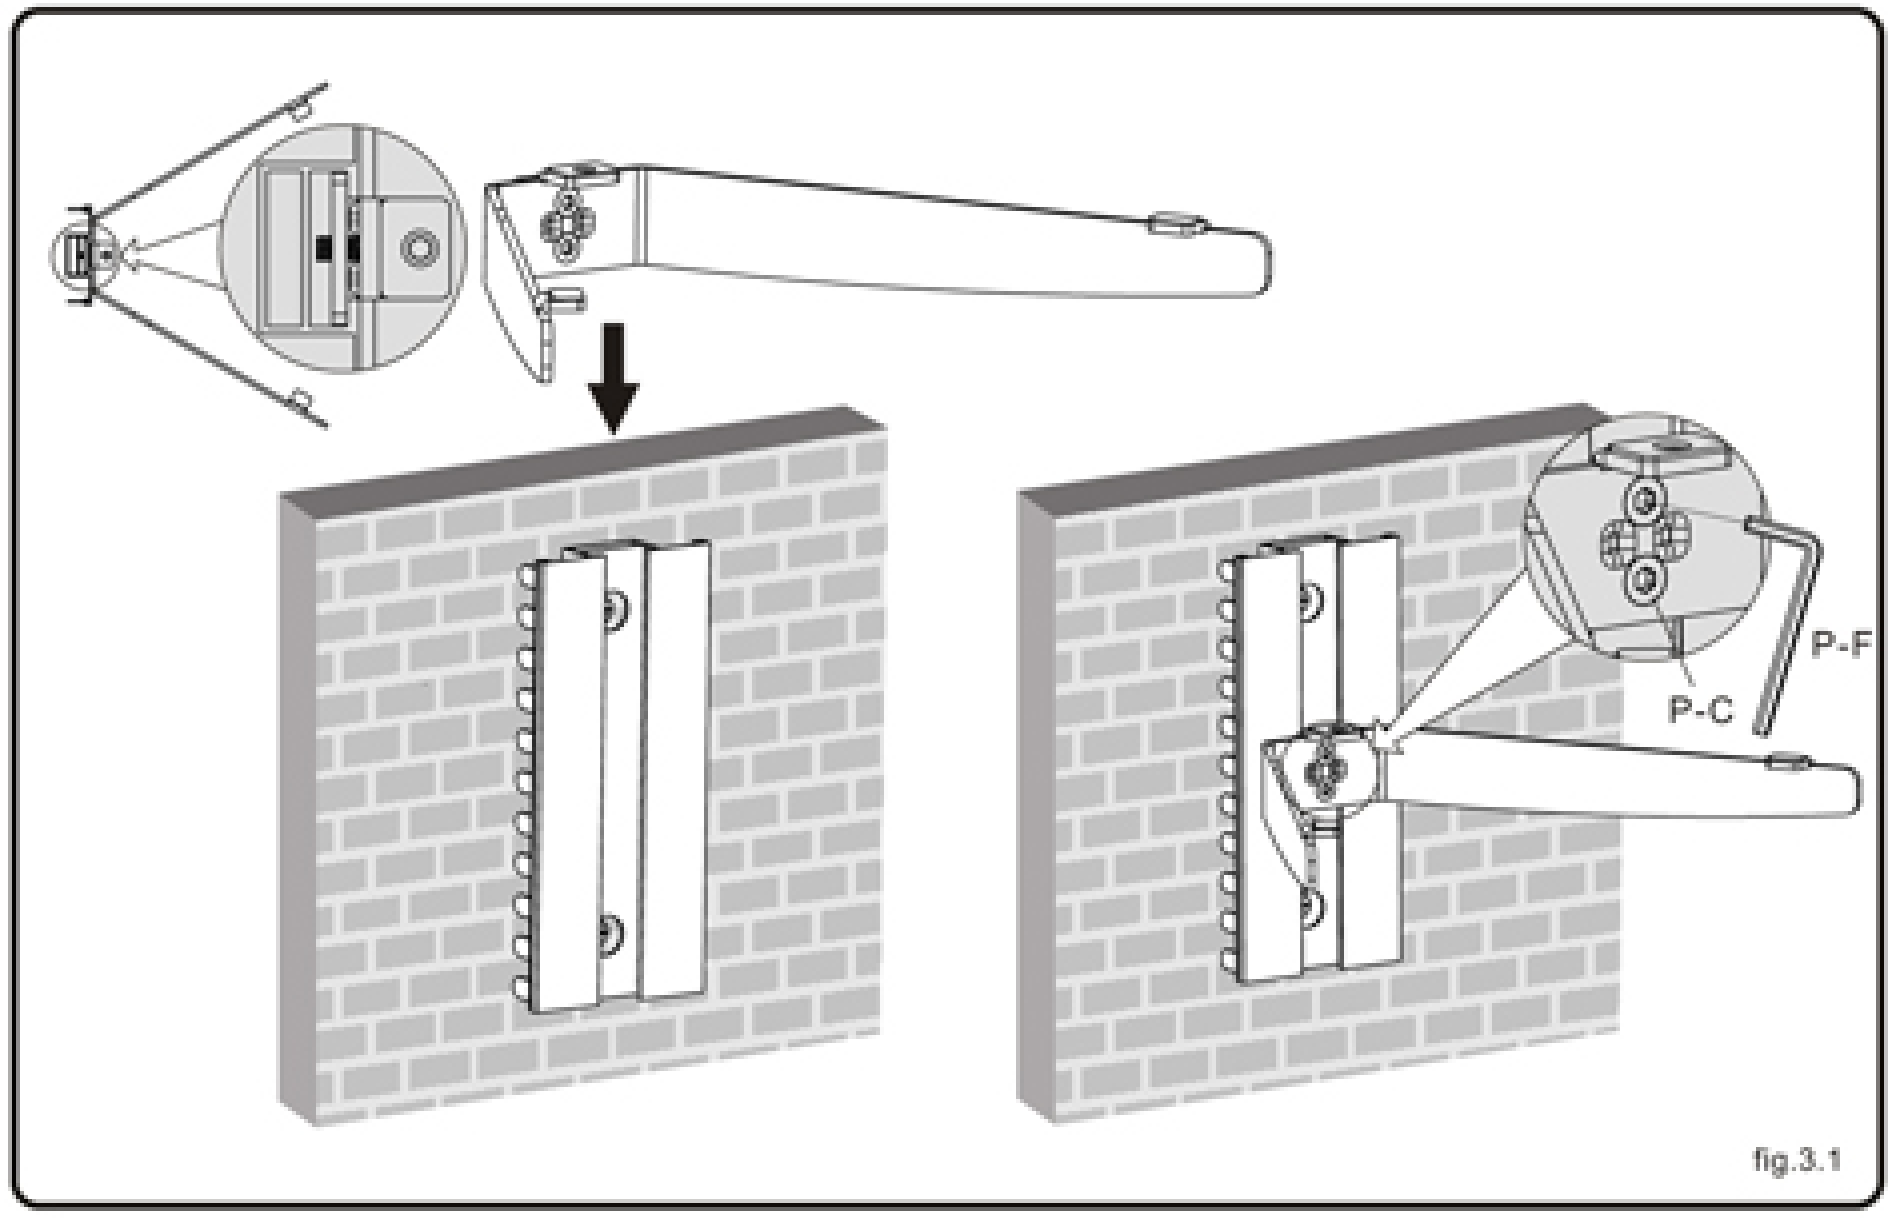

fig.3.1

- Insert two decorative covers to the top and bottom of wall plate respectively and install two plastic covers as shown in fig.3.2.
- You can adjust the height of the glass holder as needed. Loosen the two screws with a 3mm Allen key (but not remove)to adjust the glass holder at the desired height and then tighten two screws with a 3mm Allen key as shown in fig.3.2.

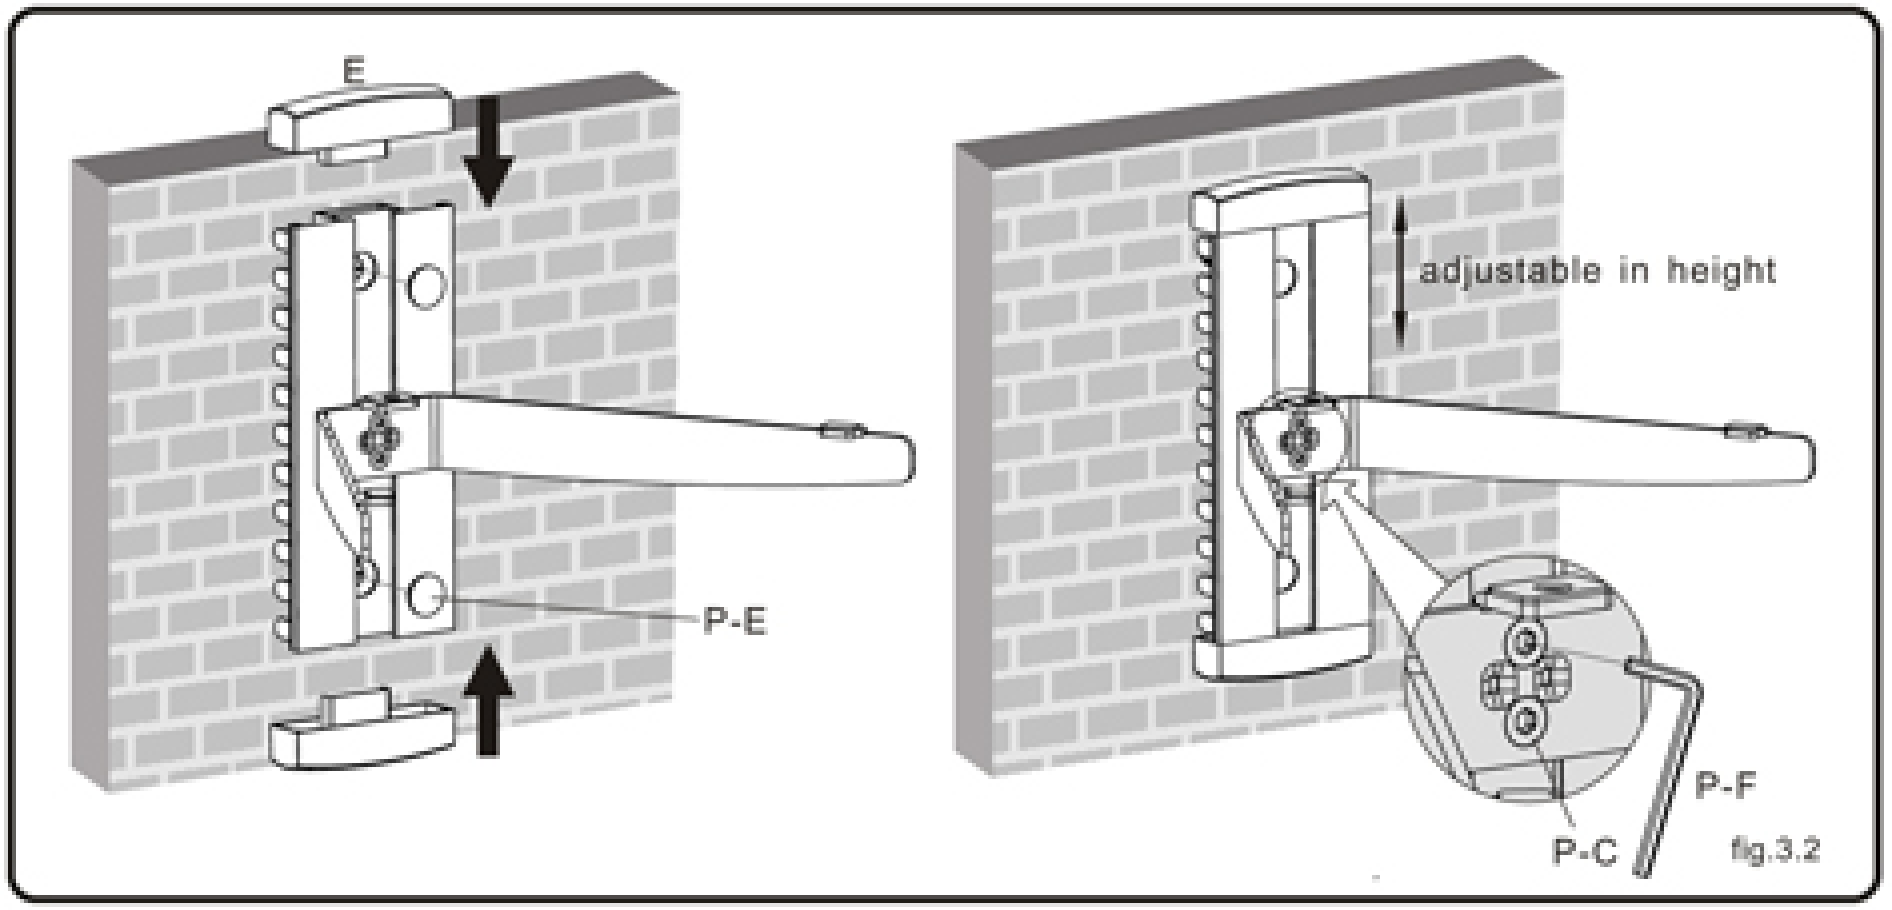

fig.3.2

4 Installing The Glass Shelf

Place the glass shelf gently on the glass holder. Attach the glass shelf to the glass holder using a screw and plastic bush, tighten screw with a 3mm Allen key but not tighten completely at this time. Center the glass shelf over hole, securely tighten screw with a 3mm Allen key as shown in fig.4.1.

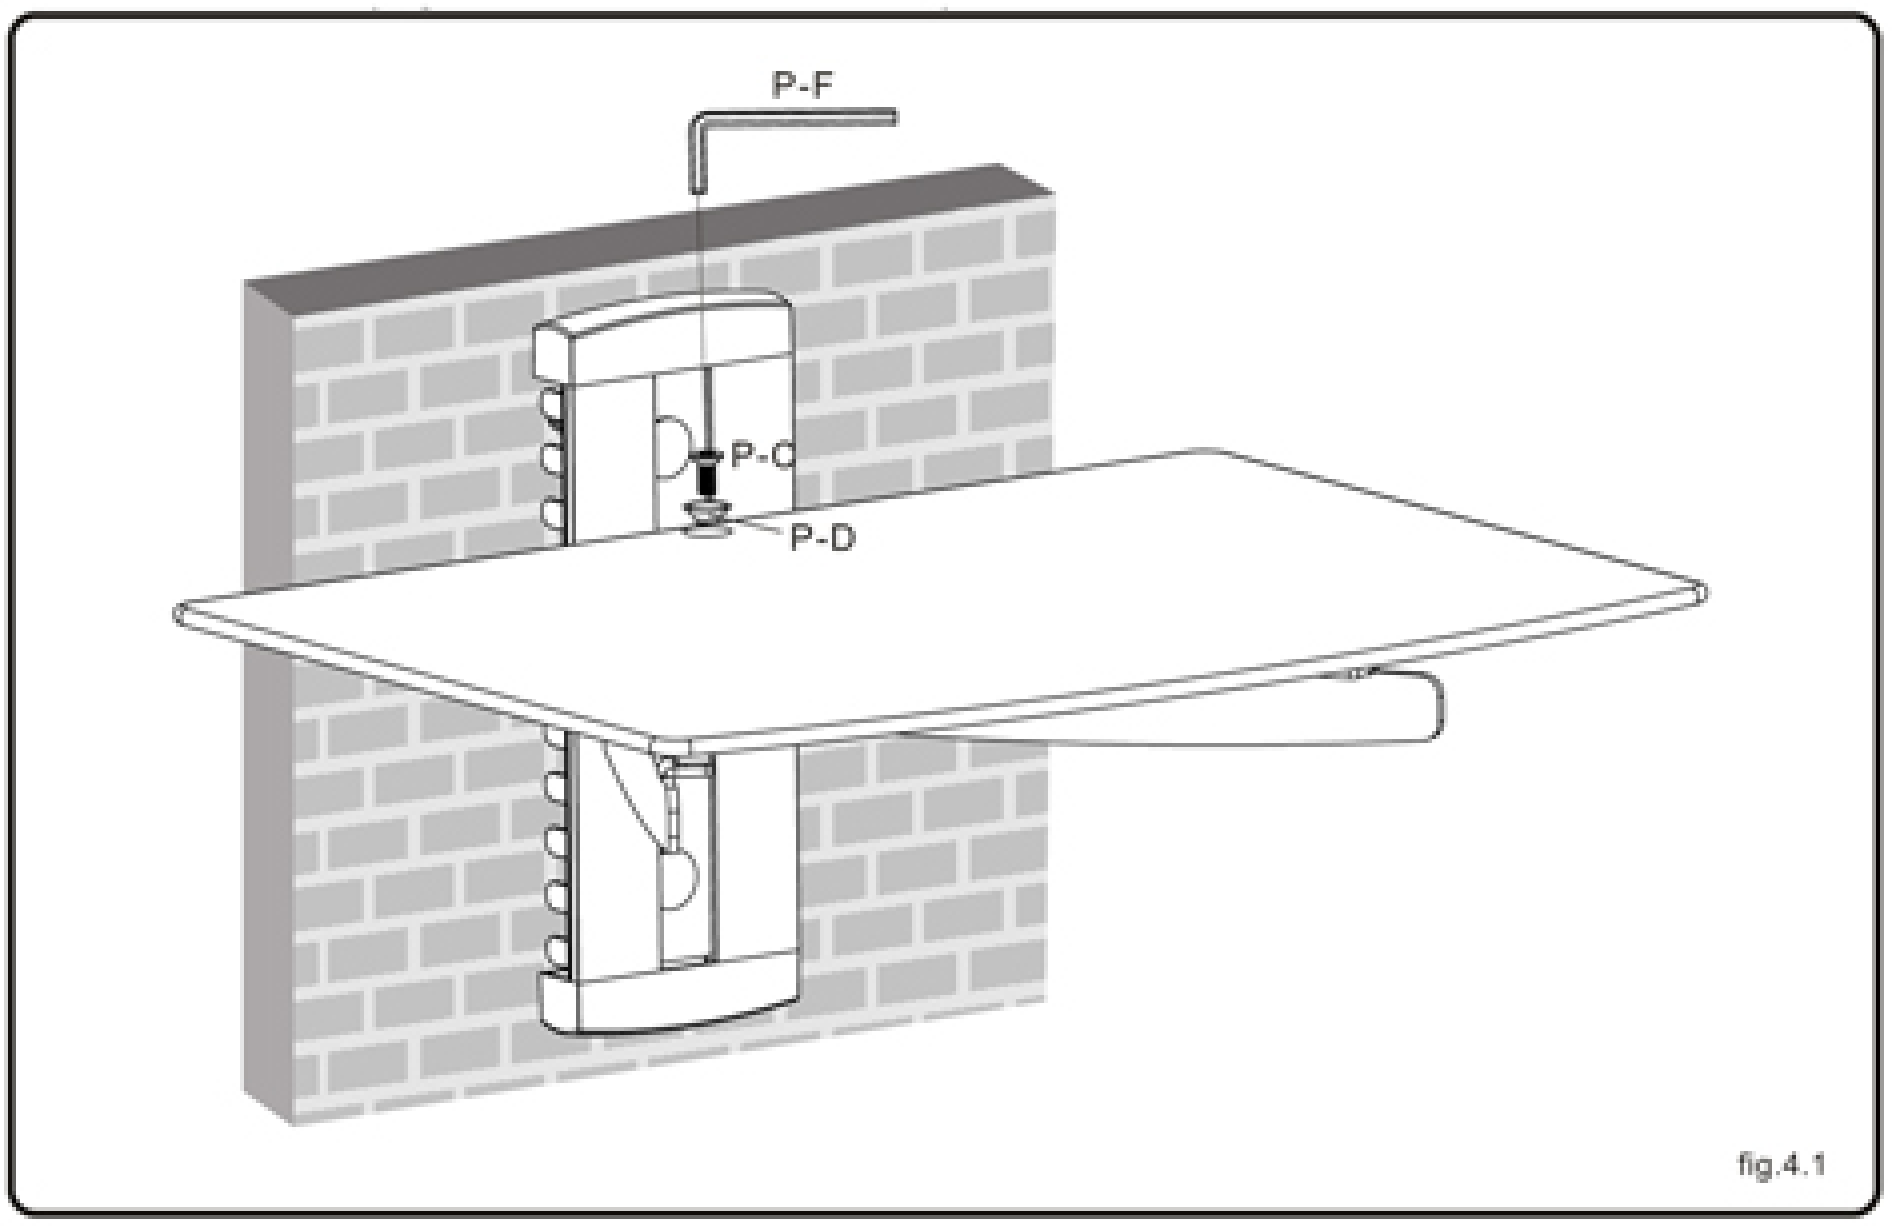

fig.4.1